

## IO-Link Product Catalog

### Specifications

IO-Link Signal Beacons NE-IL					
Model	NE-ILNB-M	NE-ILTB-M	NE-ILXB-M	NE-ILNN-M	NE-ILTN-M
	With buzzer	With buzzer and touch sensor	With buzzer, touch sensor, and digital / analog input	Without Buzzer	With touch sensor
Size	φ56mm				
Rated Voltage	24V DC				
Mounting Location / Mounting Direction	Indoors, Upright				
Protection Rating	IP65 NEMA TYPE 4X, 13				
LED Color	Multi-color (Red, Amber, Green, Blue, White, Purple, Cyan)				
LED Unit Modes	Continuous / Flashing				
Sound Pressure	Typ. 88 dB [8 sound types (Selectable)]				
Conformity Standards	●EMC Directive (EN 61000-6-4, EN 61000-6-2) ●RoHS Directive (EN 50581) ●UL 508, CSA-C22.2 No. 14 ● FCC Part 15 Subpart B Class A ● KC (KN 61000-6-4, KN 61000-6-2)				
Connection	M12 connector 5 pins A code	M12 connector 8 pins A code	M12 connector 5 pins A code	M12 connector 5 pins A code	M12 connector 5 pins A code

IO-Link Signal Tower LR6-IL			
Model	LR6-3ILWMNW-RYG	LR6-ILWMNW	LR6-ILWCNW
	Pre-assembled Model (Direct mount)	Body Unit (Direct mount)	Body Unit (1/2" NPT pipe or direct mount)
Size	φ60mm		
Rated Voltage	24V DC		
Mounting Location / Mounting Direction	Indoors, Upright		
Tier	LED Unit: Max. 5 tiers and one buzzer unit		
LED Color	Red / Amber / Green (Blue and White LED units also available)	N/A - LED units are sold separately	
LED Unit Modes	Continuous / Flashing		
Buzzer Sound Pressure	Typ. 84 dB (Use LR6-BW)		
Buzzer Sound Selection	4 sound types (Selectable) (Use LR6-BW)		
Protection Rating	IP65 NEMA TYPE 4X, 13		
Conformity Standards	●EMC Directive (EN 61000-6-4, EN 61000-6-2) ●RoHS Directive (EN 50581) ●UL 508, CSA-C22.2 No. 14 ● FCC Part 15 Subpart B Class A ● KC (KN 61000-6-4, KN 61000-6-2)		
Connection	M12 connector 5 pins A code		

### How to Order

#### NE-ILXB-M

Touch Sensor  
 X : With touch sensor and digital / analog input\*  
 T : With touch sensor  
 N : No touch sensor  
 \* Only with buzzer type

LED Color  
 M : Multi-color

Buzzer  
 B : With Buzzer  
 N : Without Buzzer

#### LR6-3ILWMNW-RYG

Size  
 6 : φ60mm

Tier  
 3 : 3 tiers

Extended Function  
 IL : IO-Link

LED Unit Color  
 RYG: Red, Amber, Green

Body Color  
 W: Off-White

Buzzer  
 B: With Buzzer  
 N: No Buzzer

Mounting and Wiring  
 WM : Direct mounting / M12 connector (3-point mounting)  
 WC : Direct mounting / M12 connector (M30 nut attached)

#### PATLITE Corporation

4-1-3, Kyutaromachi, Chuo-ku, Osaka 541-0056 Japan  
 International Sales Division  
 TEL:+81-6-7711-8953 FAX:+81-6-7711-8961 E-mail: overseas@patlite.co.jp

#### PATLITE (U.S.A.) Corporation

20130 S. Western Ave. Torrance, CA 90501, U.S.A.  
 TEL:+1-310-328-3222 FAX:+1-310-328-2676 E-mail: sales@patlite.com

#### PATLITE (SINGAPORE) PTE LTD

No.2 Leng Kee Road, #05-01 The Hong Centre, Singapore 159086  
 TEL:+65-6226-1111 FAX:+65-6324-1411 E-mail: sales@patlite.com.sg

#### PATLITE (CHINA) Corporation

Room 1102-1103, No.55, Lane 777, Guangzhong Road (West), Jing an District, Shanghai, China 200072  
 TEL:+86-21-6630-8969 FAX:+86-21-6630-8938 E-mail: sales@patlite.cn

#### PATLITE Europe GmbH

Am Soeldnermoos 8, D-85399 Hallbergmoos, Germany  
 TEL:+49-811-9981-9770-0 FAX:+49-811-9981-9770-90 E-mail: info@patlite.eu  
 WEEE Reg. Nr. 67267160

[www.patlite.com](http://www.patlite.com)

#### PATLITE KOREA CO., LTD.

A-2603, Daesung D-POLIS, 606, Seobusaet-gil, Geumcheon-gu, Seoul, 08504, Korea  
 TEL:+82-2-523-6636 FAX:+82-2-861-9919 E-mail: sales@patlite.co.kr

#### PATLITE TAIWAN CO., LTD.

2F-1, No.215, Sec. 2, Chengde Rd., Datong Dist., Taipei City 10364, Taiwan (R.O.C.)  
 TEL:+886-2-2555-1611 FAX:+886-2-2555-1621 E-mail: info@patlite.tw

#### PATLITE (THAILAND) CO., LTD.

Olympia Thai Tower, 15th Floor 444 Ratchadapisek Road Samsenok, Huay Kwang Bangkok 10310, Thailand  
 TEL:+66-2-541-5431 FAX:+66-2-541-5429 E-mail: sales\_150716@patlite.co.th

#### PATLITE MEXICO S.A. de C.V.

Plaza de La Paz No. 102, int. 712 Guanajuato Puerto Interior, Silao, Gto, C.P.36275, Mexico  
 TEL:+52-472-748-9124 E-mail: ventas@patlite.com.mx

#### CAUTION

To ensure correct use of these products, read the "Instruction Manual" prior to use. Failure to follow all safeguards can result in fire, electric shock, or other accidents. Specifications are subject to change without notice.


IO-Link

RoHS 10 CE cULus FCC KC

0-AI06D EN 2011


IO-Link is an open-standard protocol that enables bi-directional data communication between devices and the master. Incorporate PATLITE signal devices into IO-Link to facilitate and enhance manufacturing processes.

**Solution 01** Automotive Production Line

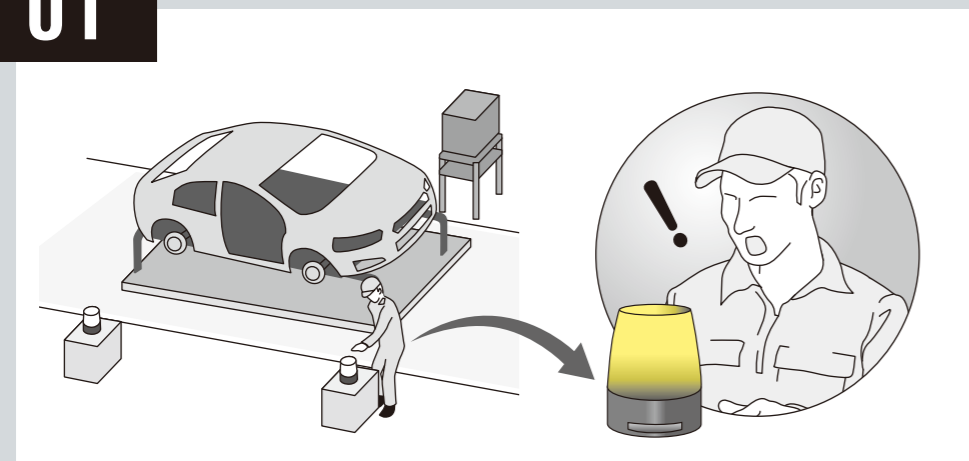

Call for parts and notify managers of issues.

**Solution 03** Various Industrial Equipment

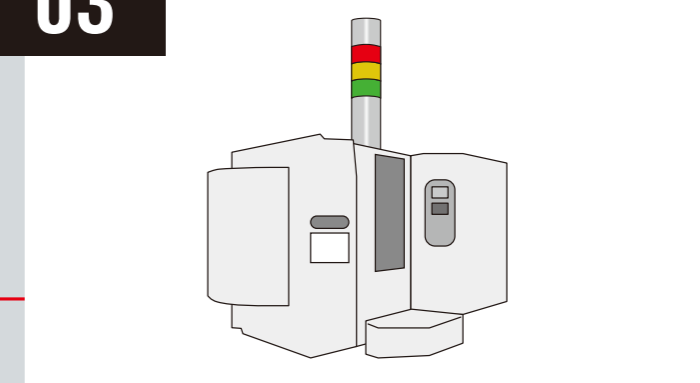


Reduce wiring costs and device setup time.

**Solution 02** Food and Beverage Production Line



Acquire real-time equipment status and collect operational metrics.


**Solution 04** Devices Not Compatible with IO-Link

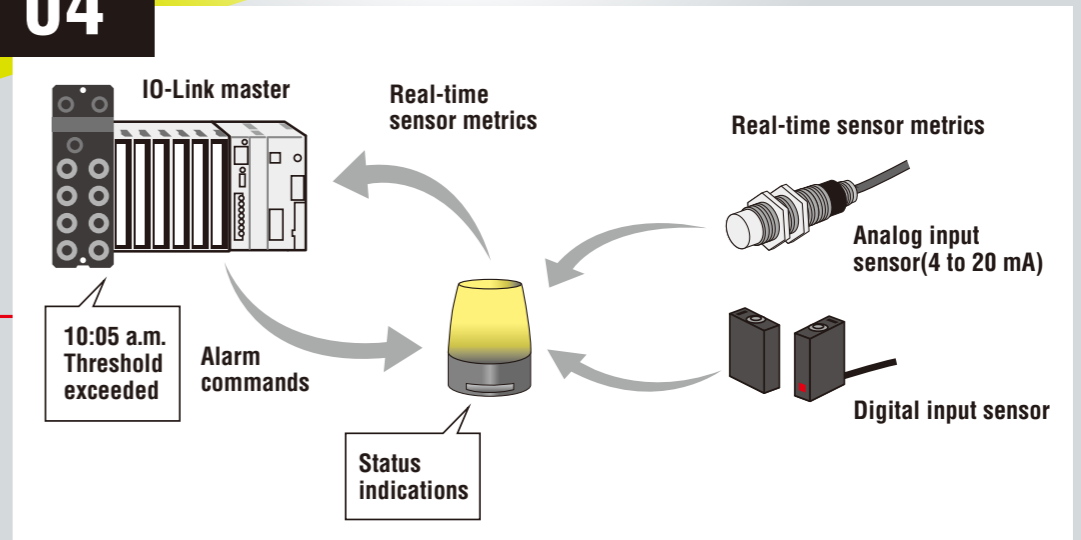

Enables integration of non-compatible devices into IO-Link.

**Solution 01** Automotive Production Line

**Call for parts or request assistance with a single touch**

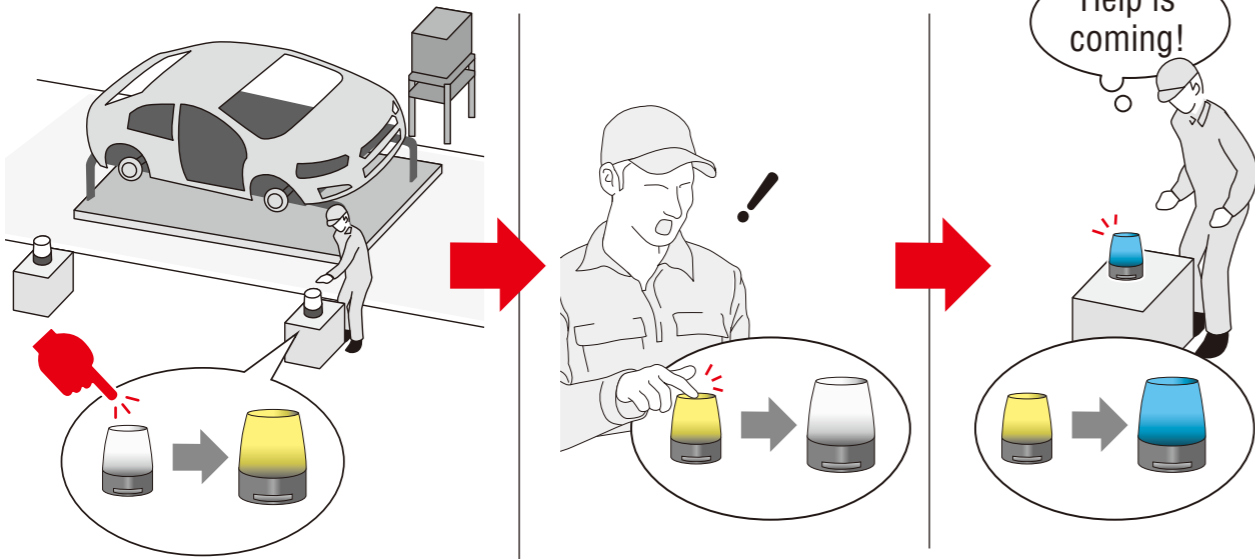


When an issue arises, the personnel at the production site touches the NE-IL to activate the visual and audible alarms of the NE-IL at the manager's site.


The manager instantly notices the alarms, and determines where and what the issue is according to the illuminated color. The manager can touch the NE-IL to send notification back to the production site to indicate that help is on the way.

**Solution 02** Food and Beverage Production Line

**Anticipate issues and enhance predictive maintenance**

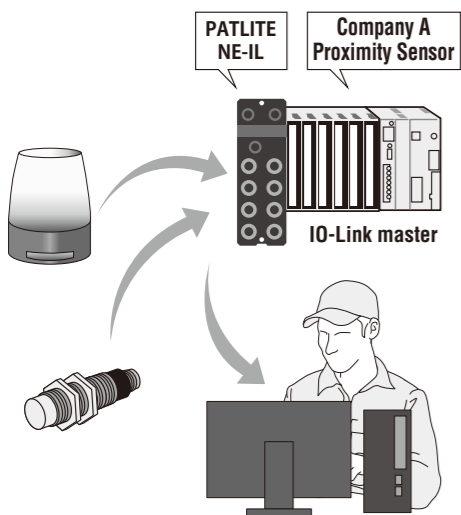

The IO-Link master acquires real-time operational data of the sensors and other devices that are connected. This data can be monitored remotely, and collected for further analysis.

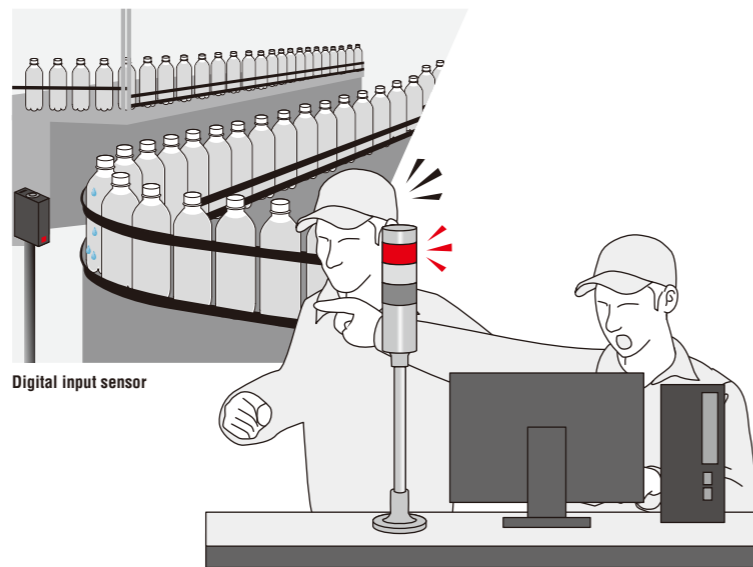


When device abnormalities such as water or dust obstruction is detected, the IO-Link master sends commands to the LR6-IL Signal Tower to activate its visual and audible alarms to indicate the specific problem. Identify device issues before it happens to avoid equipment malfunctions and halts in production.

**Solution 03** Various Industrial Equipment


**Standardizing with IO-Link reduces overall costs**

The NE-IL Signal Beacons and LR6-IL Signal Towers can be connected to IO-Link with a single M12 cable. This minimizes wiring requirements, which reduces labor and costs. In addition, IO-Link allows for easy replacement of old or damaged devices, as it automatically imports previous settings to the new device.



**Solution 04** Devices Not Compatible with IO-Link


**Devices Not Compatible with IO-Link**

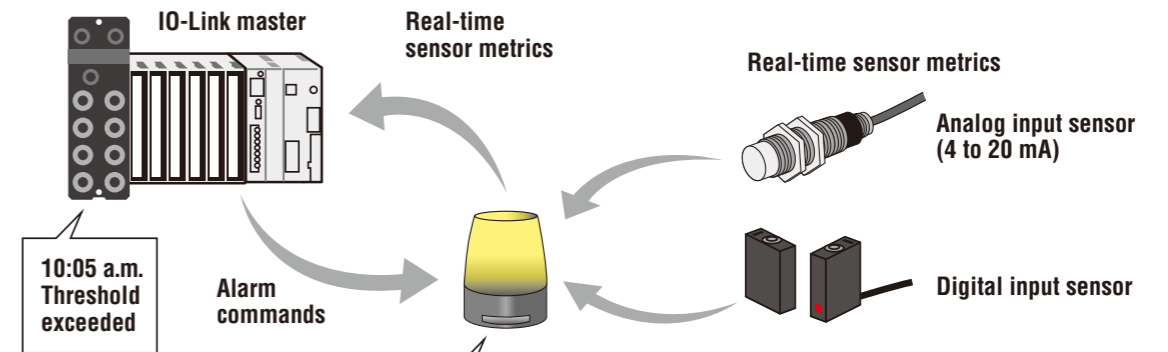


For devices that are not compatible with IO-Link, the digital / analog inputs on the NE-ILXB-M model can be used as an IO-Link hub. Real-time sensor metrics are sent to the beacon, which sends this data to the master. The master can then send specific commands to activate the beacon alarms.

**Example of Use**

**Achieve timely responses to issues**

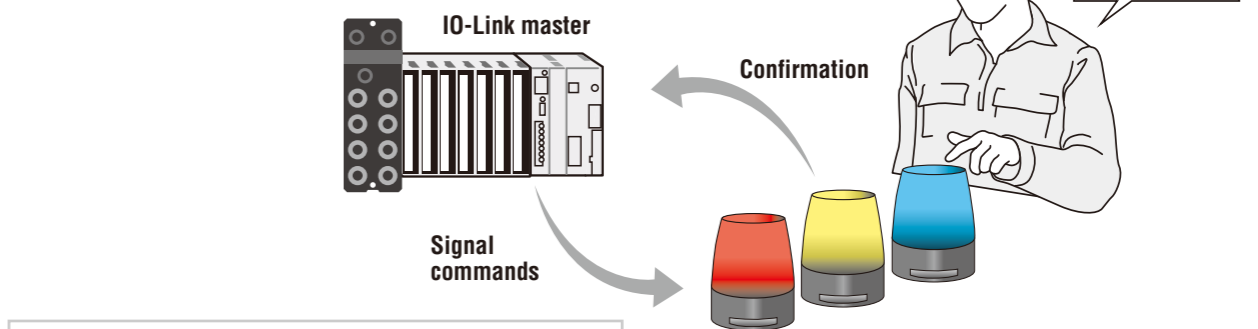

**Color-code each state for easy recognition**

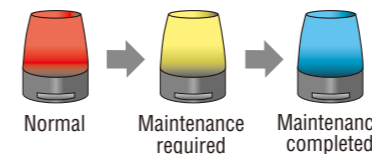

With 7 colors achievable on the NE-IL signal beacon, it is possible to color-code multiple statuses. The master sends commands to activate a specific NE-IL beacon to indicate which device / equipment requires maintenance. Once maintenance is complete, touch the NE-IL to confirm back to the master.

**Features**



7 colors in 1 light



2-way communication (commands from the master and indications via touch sensor)



Buzzer can be sounded in combination with continuous/flashing light and touch sensor



Digital/analog input to connect devices that are not compatible with IO-Link (XB model only)

**Durable and Versatile**



Touch sensor is able to detect bare or gloved hands - even when wet



High protection rating for operation in harsh environments (IP65)




Compatible with M12 connector for easy connection


**Other Application Examples**



Pick-to-light

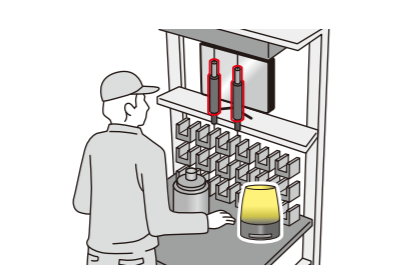

Status indications at production cells

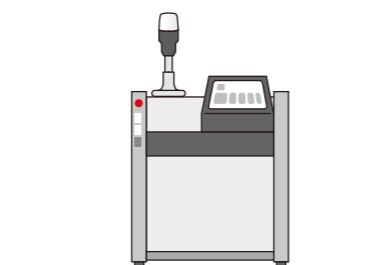

Real-time equipment status monitoring

**Options**

**Upper Bracket**  
NE-001D



**Wall Mount Bracket**  
NE-002D



**1/2" NPT Bracket**  
SZP-092D



**Features**



Pre-assembled model

Body unit (Direct mount)

Body unit (1/2" NPT pipe or direct mount)

M12 connector for easy connection

Select from a variety of LED colors and buzzer sounds

**Compatible Units**


**Solid Color**  
LR6-E-R/Y/G/B/C



**Clear Globe**  
LR6-E-RZ/YZ/GZ/BZ



**Multi-Color**  
LR6-E-MZ

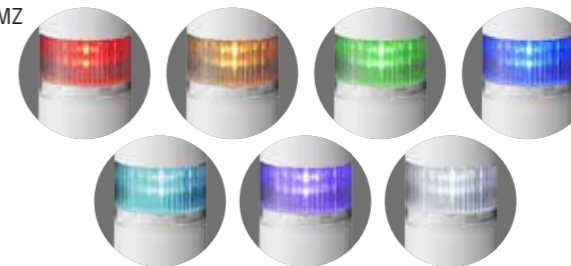

**Buzzer Unit**  
LR6-BW



**Wireless Data Acquisition System Transmitter**  
WDT-6LR-Z2



Cost-effective, retrofit solution for select PATLITE Signal Towers enabling wireless data acquisition and real-time monitoring.

**Options**


**Wall Mount Bracket**  
SZK-003W



**Pole Bracket**  
SZ-016A



**Pole**  
POLE-800A21



POLE-300A21



POLE-100A21



**Upper Bracket**  
SZP-004W



SZ-010

