



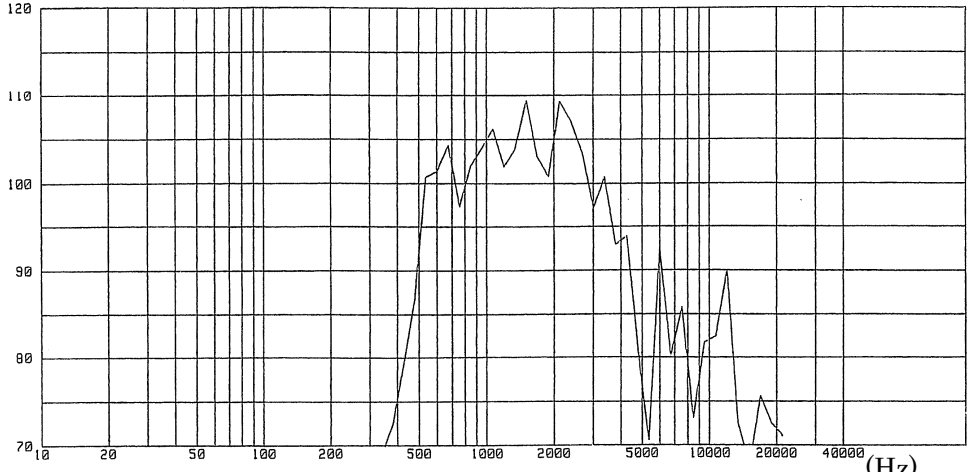
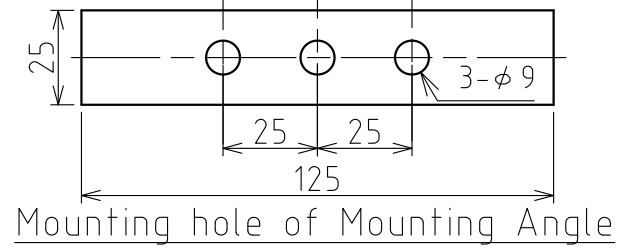


製品仕様書

Model	S P W - 5 E		
Rated Power Input	5 W		
Impedance	8 Ω		
Sound Pressure Level	102dB(at1m) Average level of sound pressure of 1000Hz,1500Hz,2000Hz,3000Hz		
Operating Temperature Range	- 2 0 °C ~ + 6 0 °C		
Mounting of Product			
	Normal direction Indoor:OK/Outdoor (*1)	Reverse direction Indoor:OK/Outdoor (*1)	Lateral direction Indoor:OK/Outdoor (*1)
(*1) Mount the horn facing more downward than the horizontal.			
Protection Rating	I P 5 3		
Mass	1 . 2 k g		
Product Cycle	1000h		
Dimensions	Refer to Dimensions No.2/2		
Output frequency Characteristic	<div style="display: flex; align-items: flex-start;"> <div style="margin-right: 10px;">(dB)</div>  </div>		

S P W - 5 E - W 1 8 B - 1 _ 2

株式会社 **パトライト**

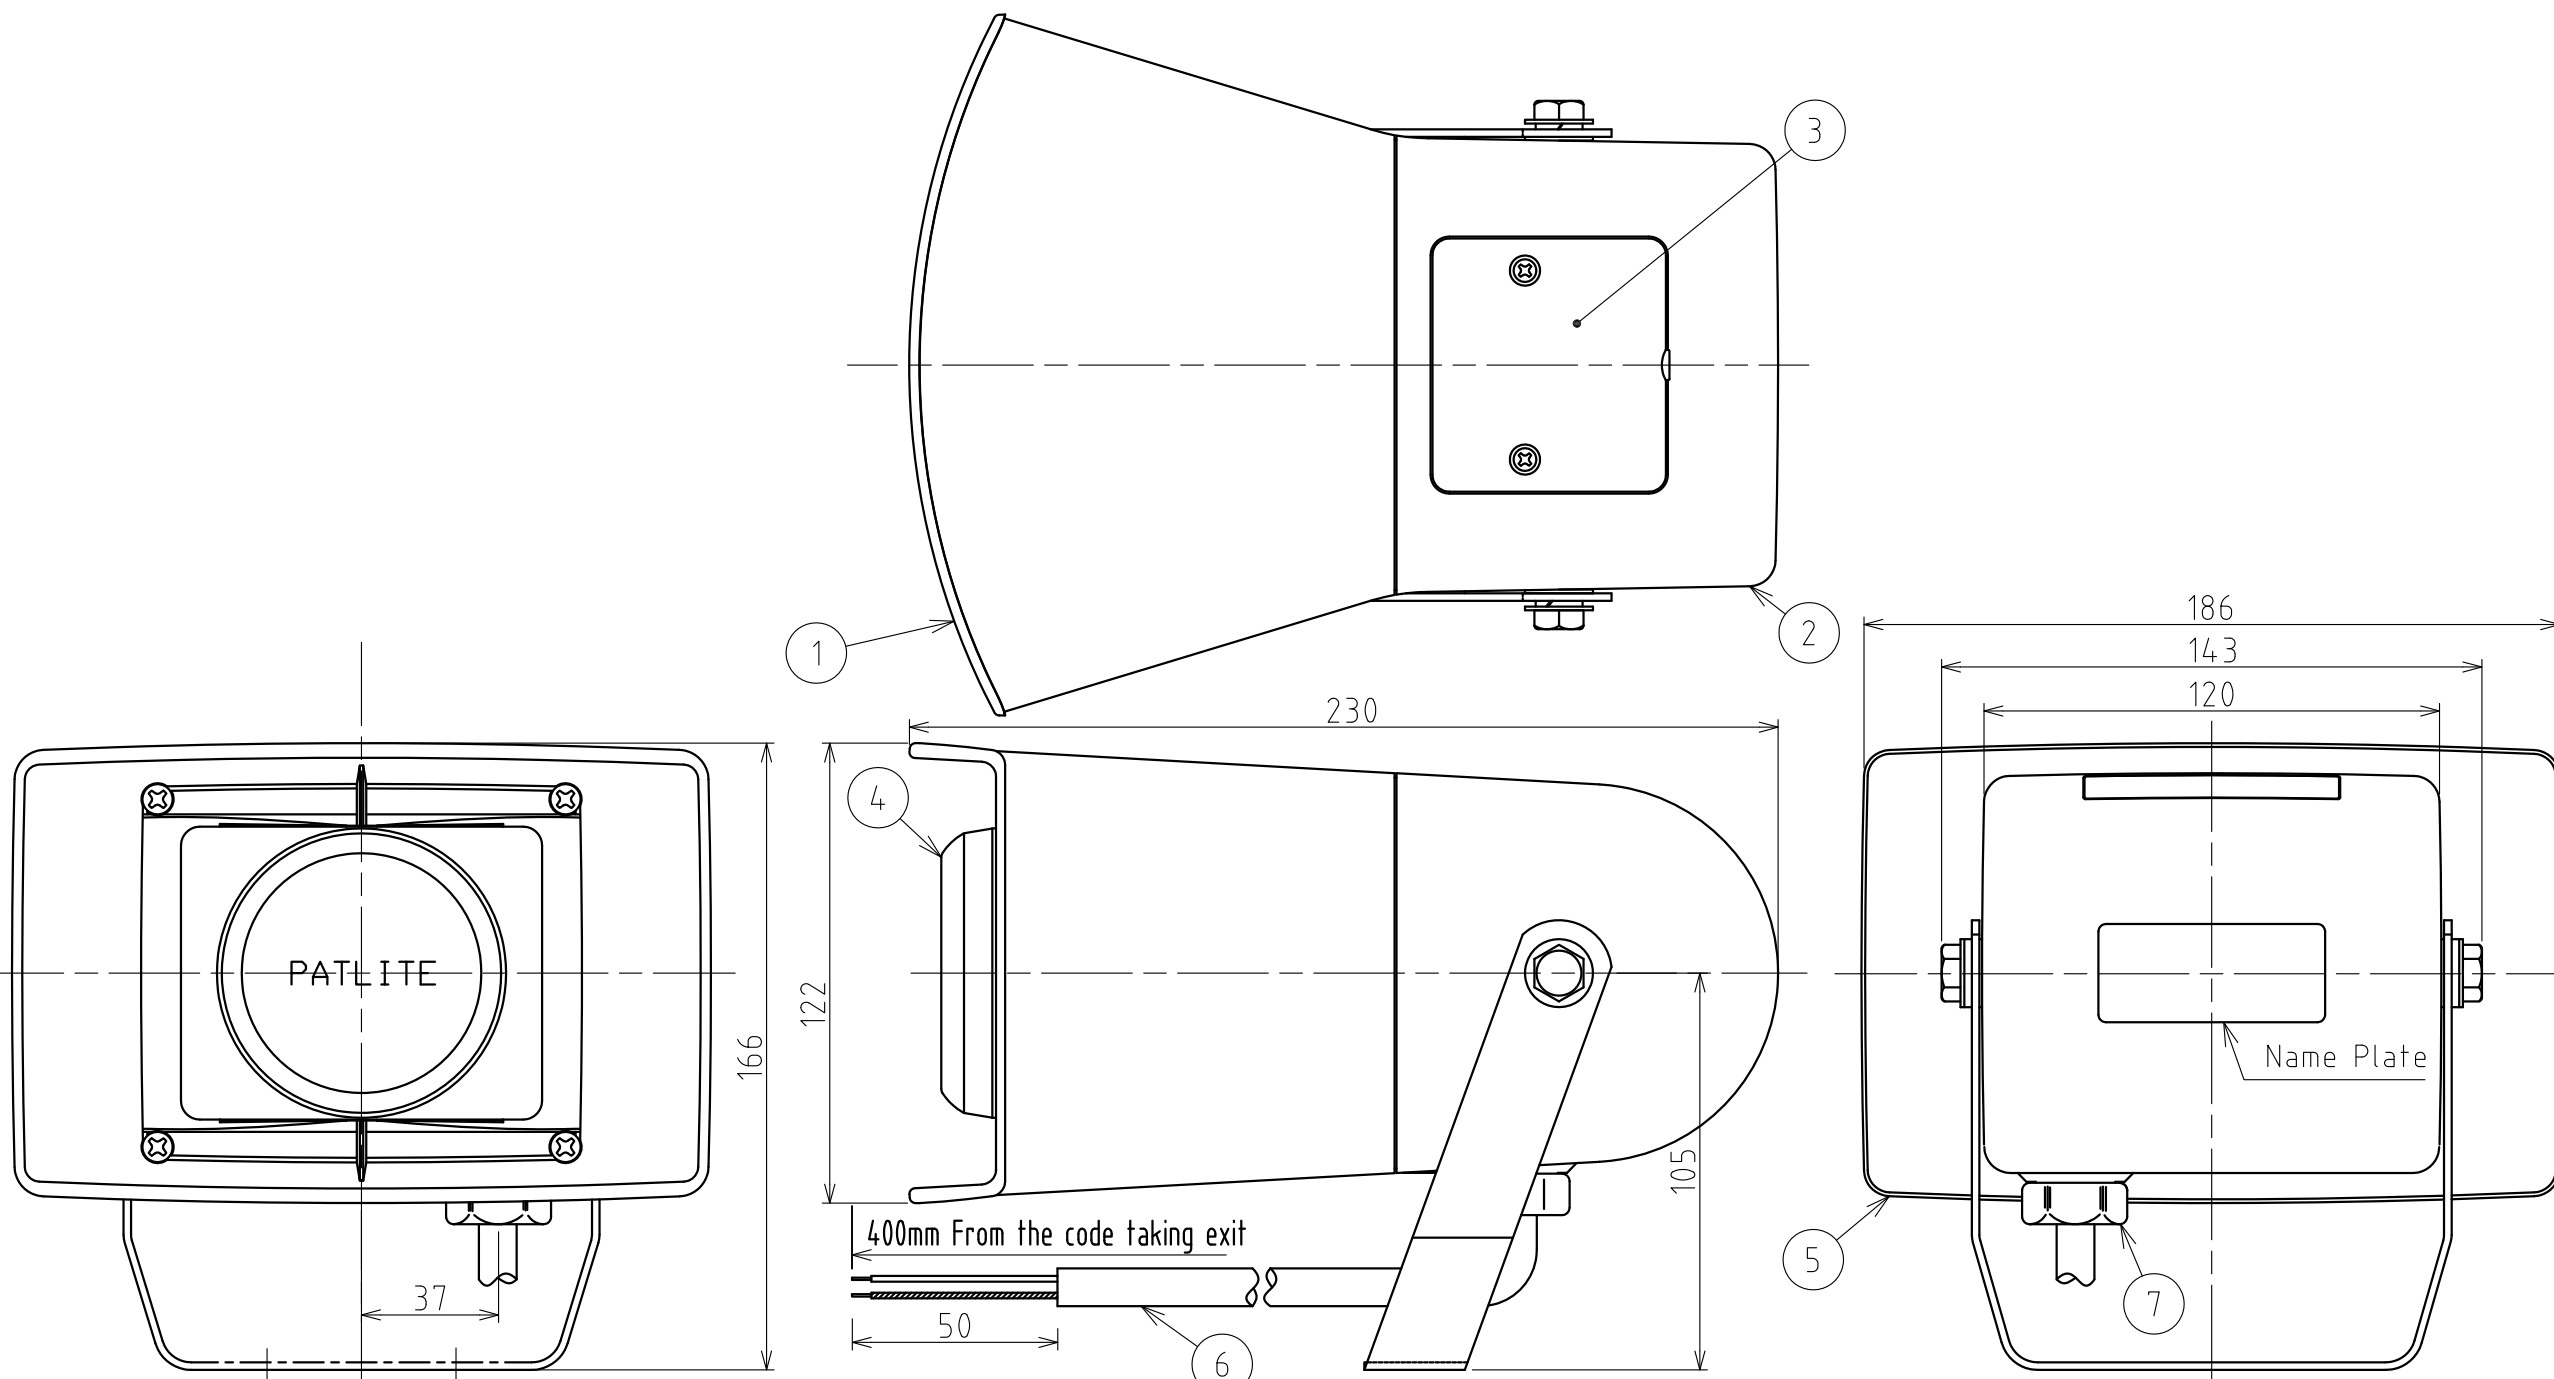

7	Bush		1	PA	
6	Wire		1	VCT 0.75mm ² ×2c φ9	
5	Mounting Angle		1	SUS304 t=2.0	
4	Speaker Cover		1	ABS	Light gray
3	Cover		1	ABS	Light gray
2	Rear Case		1	ABS	Light gray
1	Front Case		1	ABS	Light gray
番号 No.	部品名 Part Name	品目コード Part No.	数量 Qty.	材料 & 寸法 & 処理 Material & Size & Finish	記事 Remarks

外観図面
Outer Dimension Drawing

株式会社 パトライト
PATLITE Corporation

SPW-5E-W18B-2_2