


Specification

Model Name	SZ-110(D/S)
Corresponding Model	LS7
Operating Temperature	-30℃~60℃
Mounting Location	Indoors, upright
Protection Rating	IP54(IEC60529)
Vibration Resistance	JIS C 60068-2-6 Less than 57Hz, Vibration half amplitude 0.15mm More than 57Hz, Acceleration amplitude 19.6m/s ²
Mass	100g ±10%
Conformity Standards	RoHS Directive(DIRECTIVE 2002/95/EC)

Chart1

Color	Model Name
OFF WHITE	SZ-110
DARK GRAY	SZ-110D
SILVER	SZ-110S

※ Hexagon nut with flange
Tightening torque
1.42N·m
Mounting surface
Max thickness : 10mm or less

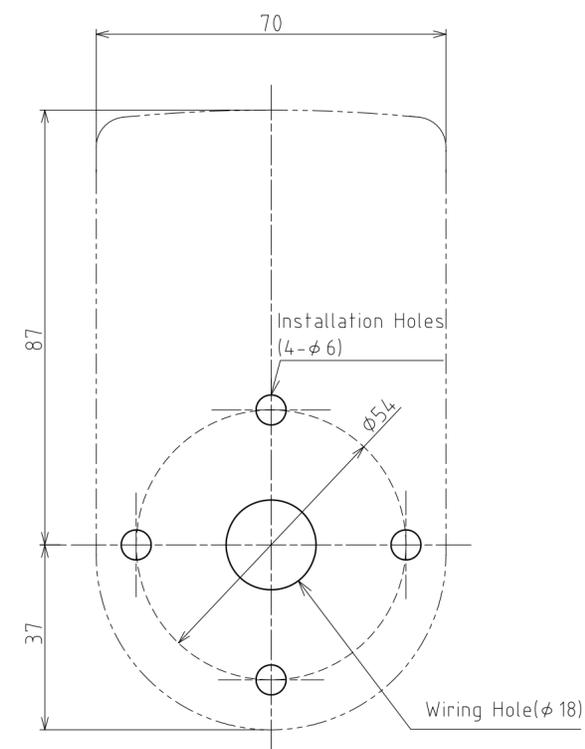

Drawing1. Installation Drawing

6	Hexagon nut with frange		4	M5 MFZn-C	accessories
5	Sponge washer		4	CR	accessories
4	+Pan head scres with PW SW		4	M5×25 PW=10×0.8 MFZn-C	accessories
3	Waterproof packing		1	CR	Black
2	O-ring		1	Silicon rubber	Light gray
1	BRACKET		1	ABS	Refer to chart 1
番号 No.	部品名 Part Name	品目コード Part No.	数量 Qty.	材料 & 寸法 & 処理 Material & Size & Finish	記事 Remarks

製品仕様書
Specifications
株式会社 パトライト
PATLITE Corporation
SZ-110. -W18B